

# OCD 100 by POSLIGNE® customer display



A customer display with a touch of colour and a touch of style!

Unlike traditional vertical displays, the OCD 100 has a contemporary look which is fully in keeping with the POSLIGNE® design spirit.

It's extremely compact and looks just right on any sales counter. Units are supplied with three different colour clip sets as standard,

enabling users to customise their display to match their point of sale's colours and style.

The OCD 100 features two 20-character display lines and full tilt capability, with self-powering available via serial or USB Retail ports.

# OCD 100 colour and style

- Available with the "Clip'n Color" system
- Compact - minimal cash desk footprint
- 20° tilt angle
- High brightness

## CLIP'N COLOR

OCD 100 graphite clips



OCD 100 pearl clips



Optional colour kit



### MODEL

### OCD 100

|                      |   |
|----------------------|---|
| Display mode         | fluorescent   |
| Colour               | blue-green display  |
| Number of characters | 40: 2 lines x 20 characters                                   |
| Character matrix     | 5 x 7 dot matrix  |
| Character size       | 9 x 5.25mm  |
| Available characters | 96 alphanumeric characters<br>13 international character sets |
| Brightness           | 700cd/sqm   |

### CONNECTIONS

|              |   |
|--------------|---|
| Interfaces   | RS 232C + USB Retail  |
| MTBF         | 25 000 hours  |
| Power supply | external + 12V / 6W adaptor without power supply<br>using powered RS232 or USB Retail cable |

### ENVIRONMENT

|                              |               |
|------------------------------|---------------|
| Operating temperature        | +5° / +45°C   |
| Storage temperature          | - 10° / +55°C |
| Humidity rating (in use)     | 30% - 85%     |
| Humidity rating (in storage) | 10% - 85%     |

|                    |                                 |
|--------------------|---------------------------------|
| Dimensions         | (W x H x D) : 224 x 119 x 124mm |
| Weight             | 1.55kg                          |
| Display tilt angle | 20°                             |
| Base colours       | pearl and graphite              |



Specifications are subject to change without notice

# OCD 150 by POSLIGNE® pole mounted customer display



Customer display  
reaches for the skies!


Thanks to this vertical pole mounted version, the POSLIGNE® stylish and colourful customer display reaches for the skies and is now directly in the customer's line of sight.

Two-way orientation adjustment – left/right swivel and up/down tilt – provides great flexibility at the point of sale and of service where space saving is a must.

Supplied with 3 different sets of clips as standard, the OCD 150 features two 20-character display lines, with self-powering available via serial or USB Retail ports.

# OCD 150 colour and style

- Exclusive « Clip'n Color » POSLIGNE system
- 40cm high pole
- 20° tilt angle (display) and 90° rotation angle (pole)
- High brightness
- Magnetic stand for better stability on metallic surface
- Easy access to the display dip-switches (to select language character set)

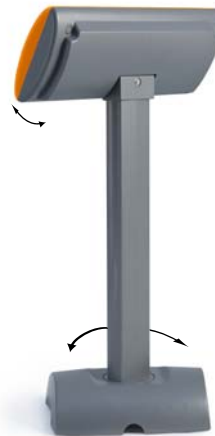


## CLIP'N COLOR

OCD 150 graphite clips



OCD 150 pearl clips



Optional colour kit



## MODEL

## OCD 150

|                      |   |
|----------------------|---|
| Display mode         | fluorescent   |
| Colour               | blue-green display  |
| Number of characters | 40: 2 lines x 20 characters                                   |
| Character matrix     | 5 x 7 dot matrix  |
| Character size       | 9 x 5.25mm  |
| Available characters | 96 alphanumeric characters<br>13 international character sets |
| Brightness           | 700cd/sqm   |

## CONNECTIONS

|              |   |
|--------------|---|
| Interfaces   | RS 232C + USB Retail  |
| MTBF         | 25 000 hours  |
| Power supply | external + 12V / 6W adaptor without power supply<br>using powered RS232 or USB Retail cable |

## ENVIRONMENT

|                              |               |
|------------------------------|---------------|
| Operating temperature        | +5° / +45°C   |
| Storage temperature          | - 10° / +55°C |
| Humidity rating (in use)     | 30% - 85%     |
| Humidity rating (in storage) | 10% - 85%     |

|                     |  |
|---------------------|--|
| Dimensions          | Height: 400mm<br>Dimensions of the base (W x D): 158 x 135mm<br>Dimensions of the display (W x D): 220 x 100mm |
| Weight              | 1kg  |
| Display tilt angle  | 20°  |
| Pole rotation angle | 90°  |
| Base colours        | pearl and graphite   |



Specifications are subject to change without notice